

Mudgeeraba Farrier Competition

24th & 25th June 2017

Mudgeeraba Showgrounds



Judge: Des Bosworth

- Competition to be run in accordance with Australian Farriers' and Blacksmiths' Association Competition Rules and By-Laws
- Fireman/Striker and hot rasping allowed for all events.
- Competitors to organize their own horse holders.
- Competitors must be members of PFBAQ or AFBA affiliated member.
- Camping/shower amenities available on grounds
- **PROOF OF PAYMENT MUST ACCOMPANY ENTRY**

ENQUIRIES: Mark O'Leary – 0407 962 623

Event 1: Novice/Intermediate Blacksmithing

Make a pair of hoof testers of your own design out of 12mm round. Length 400 mm. Fireman/striker allowed. Bring your own rivet.

Criteria: Dimensions – 10, Forging – 10, Form to Function – 10, Finish – 10.

Time: 45 minutes

Event 2: Open Blacksmithing

Make a pair of 12mm tongs with a sliding locking ring of your own design (sample blueprint provided, may be made to your own design). 400mm long, 10 mm rivet, 12 mm Reins, 25 mm x 12 mm jaws, 10 mm ring. Fireman/striker allowed. Hot rasping allowed.

Criteria: Forging– 10, Measurements -10, Welding – 15, Form to Function– 10, Finish – 10.

Time: 45 minutes

Event 3: 4 Man Draft

Teams consisting of 4 members will work together to shoe a draft horse. Each team member must complete one foot: trim foot, forge shoe, nail shoe on and finish foot. Team members may work simultaneously or in relay. Striking, hot rasping allowed. Horse handler must be a team member.

Specs: $\frac{3}{4}$ fullered flat shoe, toe clip front and hind to be hammer drawn, shoes to have definite inside and outside branches, 8 nail holes.

Barstock: 32mm x 12mm flat

Judging: Will be individual and team.

Event 4: Novice/Intermediate Shoeing

1. Shoe one hoof, 20mm x 10mm flat bar stock, plain stamped shoe, 6 nail holes, nails to suit. Toe clip (bob punched or hammer drawn).
2. Specimen shoe: Make one hind Plain Stamped, (near side), 20mm x 10mm flat steel. 130mm wide, 135mm long, quarter clipped. Bob punched or hammer drawn. 6 nail holes, Mustad E4SL nails. Hammer finish only. Fireman/striker allowed.

Time: 60 minutes

Event 5: Open Shoeing

1. Shoe one hoof, $\frac{3}{4}$ fullered, 20mm x 10mm flat bar stock. 6 nail hoes, nails to suit, toe clip.
2. Specimen shoe: Make a Lateral Break Over Front Shoe lateral $\frac{3}{4}$ fullered, medial plain stamped with a masselotte clip out of 25mm x 10mm bar stock – 145mm wide x 145mm long, 5 nail holes to suit E4 Slim nails. As per specimen.


Time: 60 minutes

Event 6: 2 Man Forging – Swap over at 30 minutes.

1. Make a Near Hind Straight Bar out of 25mm x 10mm flat bar, 145mm wide x 150mm long, $\frac{3}{4}$ fullered, 7 nail holes, Mustad E5 Slim. As per specimen.
2. Make a three quarter fullered masselotte clip shoe out of 25mm x 10mm flat bar, 6 nail holes, 150mm wide x 150mm long, E5 Slim.

Blueprints/Specimens

Event 2: Open Blacksmithing

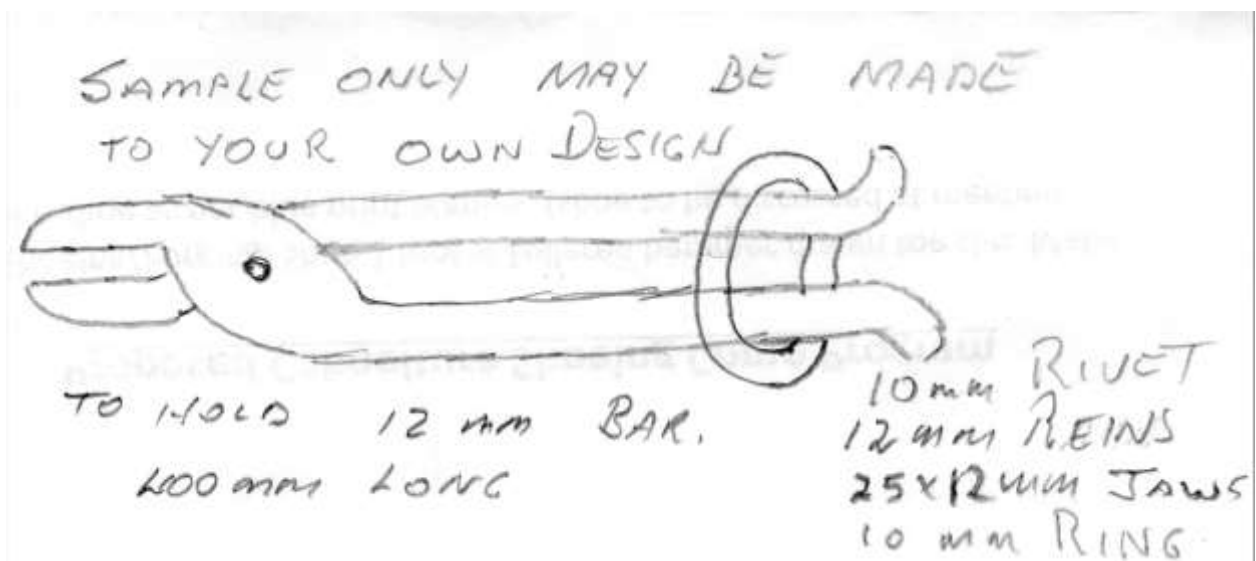

Event 4: Plain Stamped Hind



Materials & Dimensions: 295mm of pre-cut 20mm x 10mm flat steel, 130mm wide, 135mm long, side clips.

Event 5: Lateral Break Over Front Shoe



Materials & Dimensions: 25mm x 10mm bar stock, 145mm wide x 145mm long

**Event 6
Near Hind Straight Bar**



Materials & Dimensions: 25mm x 10mm flat bar, 145mm wide x 150mm long

Three Quarter Fullered Masselotte Clip



Materials & Dimensions: 25mm x 10mm bar stock, 150mm wide x 150mm long.

Entry Form

Mudgeeraba Farrier Competition

Mudgeeraba Showgrounds, 24th & 25th June 2017

Entries: \$35 per Competition per Class
 Entries must be received by: 10th June 2017

- **No late entries accepted. Proof of payment must be attached to entry.**
- **You must be a PFBAQ or AFBA affiliated member to compete at this event.**

Name:		Phone:	
Address:			
Email:			
Class:		Amount:	
		\$35/ class	
1.			
2.			
3.			
4.			
5.			
6.			
Total			\$

If entering Event 3: Four Man Draught, please provide your team members' names:

1. _____ 2. _____
 3. _____ 4. _____

Proof of payment attached

Please make cheque payable to: Professional Farriers & Blacksmiths Assoc of Qld
Or direct deposit: Suncorp. BSB: 484-799 Account: 00 000 3691

Send to:
 Brooke Graham, PFBAQ Secretary, Mudgeeraba Farrier Competition, 103 Harwoods Road, Karrabin QLD 4306

Text: 0407 416 179

Email: brooke.graham5@bigpond.com